

Product Name

QuietFiber® Hydrophobic Noise Absorption Material

For Manufacturer Info:

Contact:

Acoustiblok, Inc.
6900 Interbay Boulevard
Tampa, FL 33616
Call - (813) 980-1400
Fax - (813)849-6347
Email - sales@acoustiblok.com
www.acoustiblok.com

Product Description

Basic Use

QuietFiber hydrophobic noise absorption material is an easily installed solution to many noise problems. It is engineered specifically for maximum noise absorption and is used extensively for industrial and commercial applications and is now being successfully introduced into non-industrial environments where reverberant sound and echo is a problem.

QuietFiber®

QuietFiber is rated at the highest noise reduction level – NRC 1.00. Areas of high noise levels including sound reverberation can be resolved easily and economically by introducing QuietFiber into as much of the area as possible. The amount of noise reduction in highly reflective rooms will be directly relative to how much of the QuietFiber material can be installed into the room.

Unlike other fibrous materials which do not have the same high NRC ratings, QuietFiber is hydrophobic, meaning it will not absorb nor combine with water. Marine noise reduction applications are endless.



QuietFiber®

- Highest noise absorption rating of NRC 1.00
- Non Silica
- Virtually fireproof – Class A fire rating
 - 0 Smoke + 0 Flame Development
- Hydrophobic – will not combine with water
- Will not support mold or mildew growth
- Available in plain, black or white face
- Full outdoor weather and U.V. tolerant
- Significant sound benefit v. fiberglass
- Install on top of acoustical ceiling tiles
- High temperature capable
- Comprised of up to 90% recycled material
- 100% recyclable

Product Name

QuietFiber® Hydrophobic Noise Absorption Material


NRC 1.0 Rated	125hz	250hz	500hz	1000hz	2000hz	4000hz
	0.36	0.79	1.15	1.04	1.01	1.04

Technical Data:

- ASTM C 423 – NRC 1.00
- ASTM E 84 – Class 1, 0 Flame 0 Smoke
- ASTM C 518 – R 4.2 per inch
- ASTM C 518 – 0.24 @ 75°F (24°C)

Standards Compliance:

- ASTM C 665 Non-Corrosive Type I
- ASTM C 612 1A, 1B, II, III
- ASTM E 136 Rated Non-combustible per NFPA Standard 220
- ASTM C 1104 Absorption less than 1% by volume
- ASTM C 356 Linear shrinkage <2% @ 1200°F (650°C)

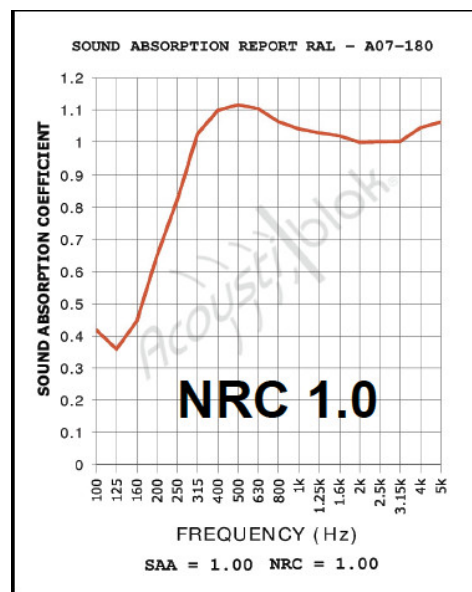

6900 Interbay Blvd
Tampa, Florida USA 33616
Telephone: (813)980-1440
www.Acoustiblok.com
sales@acoustiblok.com

Information herein is, to the best of our knowledge and belief, accurate. However, since conditions of handling and use are beyond our control, we make no guarantee of results and assume no liability for damages incurred by the use of this material/product. All material/products may present unknown health hazards and should be used with caution. Although certain hazards are described herein, we cannot guarantee that these are the only hazards that exist. Final determination of suitability of this material/product is the sole responsibility of the user. No representations or warranties, either expressed or implied, of merchantability, fitness for a particular purpose or any nature are made hereunder with respect to the information contained herein or the material/product to which the information refers. It is the responsibility of the user to comply with all applicable federal, state and local laws and regulations. Specifications subject to change without notice.