

Product Name

QuietFiber® Hydrophobic Noise Absorption Material – QF6

For Manufacturer Info:

Contact:

Acoustiblok, Inc.
6900 Interbay Boulevard
Tampa, FL 33616
Call - (813) 980-1400
Fax - (813)849-6347
Email - sales@acoustiblok.com
www.acoustiblok.com

Product Description


Basic Use

QuietFiber® hydrophobic noise absorption material is an easily installed solution to many noise problems. It is engineered specifically for maximum noise absorption and is used extensively for industrial and commercial applications and is now being successfully introduced into non-industrial environments where reverberant sound and echo is a problem.

QuietFiber® QF6

QuietFiber is rated at the noise reduction level – NRC 1.15. Areas of high noise levels including sound reverberation can be resolved easily and economically by introducing QuietFiber into as much of the area as possible. The amount of noise reduction in highly reflective rooms will be directly relative to how much of the QuietFiber material can be installed into the room.

Unlike other fibrous materials which do not have the same high NRC ratings, QuietFiber is hydrophobic, meaning it will not absorb nor combine with water. Marine noise reduction applications are endless.

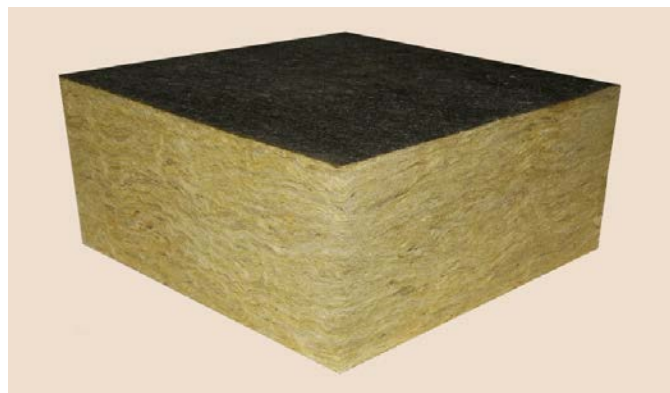

6" QuietFiber® QF6 Material

QuietFiber®

- Noise absorption rating of NRC 1.15
- Non Silica
- Virtually fireproof – Class A fire rating
 - 0 Smoke + 0 Flame Development
- Hydrophobic – will not combine with water
- Will not support mold or mildew growth
- Available in black face only
- Full outdoor weather and U.V. tolerant
- Significant sound benefit v. fiberglass
- Install on top of acoustical ceiling tiles
- High temperature capable
- Comprised of up to 90% recycled material
- 100% recyclable

Product Name

QuietFiber® Hydrophobic Noise Absorption Material – QF4

NRC 1.15 Rated	125hz	250hz	500hz	1000hz	2000hz	4000hz
	1.35	1.17	1.20	1.13	1.06	1.10

Technical Data:

- ASTM C 423 – NRC 1.15
- ASTM E 84 – Class 1, 0 Flame 0 Smoke
- ASTM C 518 – R 4.2 per inch
- ASTM C 518 – 0.24 @ 75°F (24°C)

Standards Compliance:

- ASTM C 665 Non-Corrosive Type I
- ASTM C 612 1A, 1B, II, III
- ASTM E 136 Rated Non-combustible per NFPA Standard 220
- ASTM C 1104 Absorption less than 1% by volume
- ASTM C 356 Linear shrinkage <2% @ 1200°F (650°C)



6900 Interbay Blvd
Tampa, Florida USA 33616
Telephone: (813)980-1440
www.Acoustiblok.com
sales@acoustiblok.com

Disclaimer – This text will be replaced with canned disclaimer verbiage. This text will be replaced with canned disclaimer verbiage. This text will be replaced with canned disclaimer verbiage. This text will be replaced with canned disclaimer verbiage.